

This drawing is protected by copyright and the design and all details contained therein are the confidential property of MAXWELL MARINE LTD. This drawing must be returned upon demand and must not be copied, loaned or have its contents communicated to any other person, including subcontractors, without the consent in writing from Maxwell Marine Ltd. This drawing is not to be used for any other purpose other than that for which it was originally supplied.


Note:

All installations should be carried out in accordance with USCG, ABYC, NMMA requirements.

All main power conductor terminals are to be of ring type and all terminations are to be sleeved to protect against accidental shorting.

After installation and all necessary tests - Seal terminals against moisture by spraying with CRC2403 "Plasti-coat", CRC3013 "soft seal" or CRC2409 "clear urethane"

Check rotation of winch before application of chain/rope. Swapping F1 and F2 terminals or connection 1 and 3 on solenoid box will change the rotation of winch.

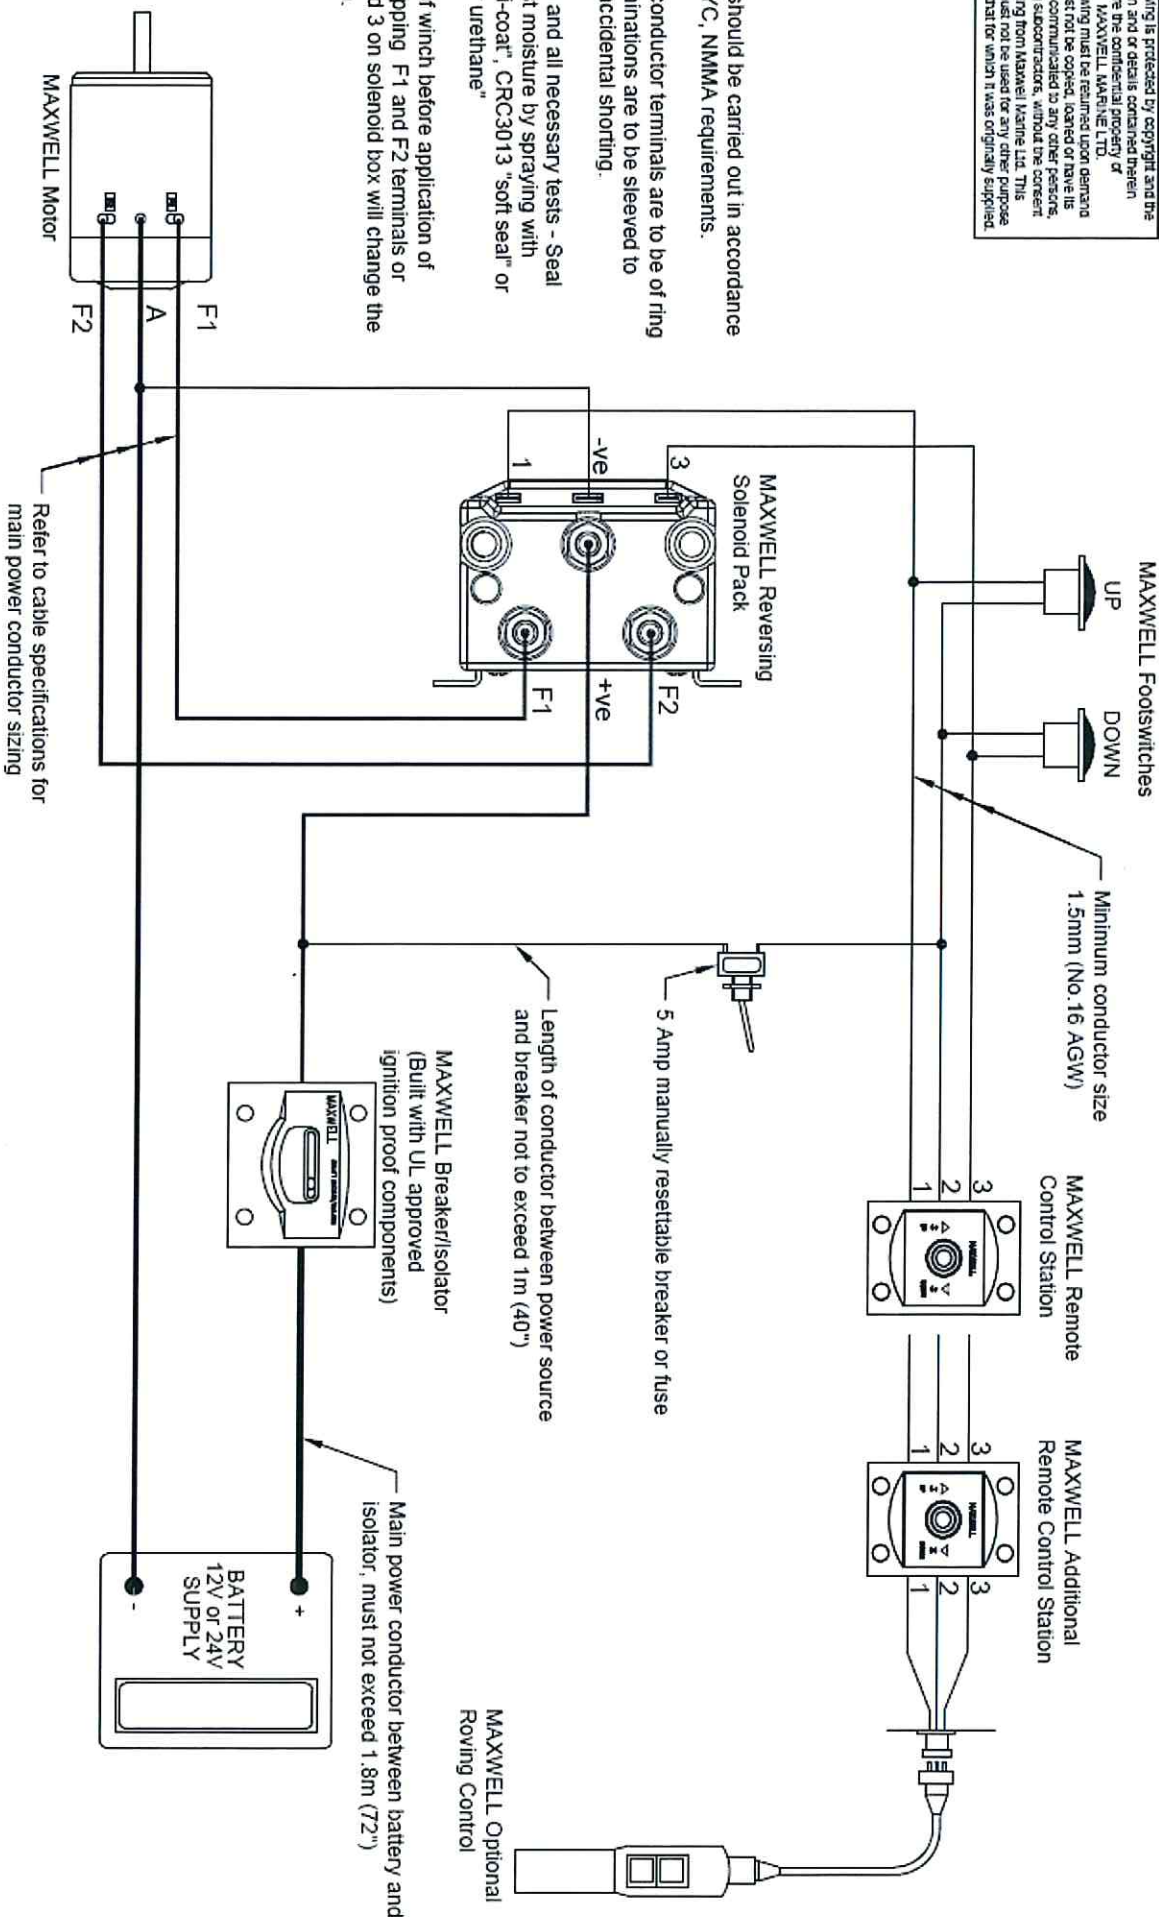

Revision	Change	Made On	Des/Drawn	Checked	BVT/Dwg No.	Description	Assy No.
1.00	Initial Issue	22/3/2017	GB		N/A	Wiring Diagram - Typical For Series Wound Motors	P101808
					BVT View		
					N/A		
					Sheet Size	Scale	
					A4	NTS	
					Sheet 1 of 1		