





PWB ANCHOR CHAIN

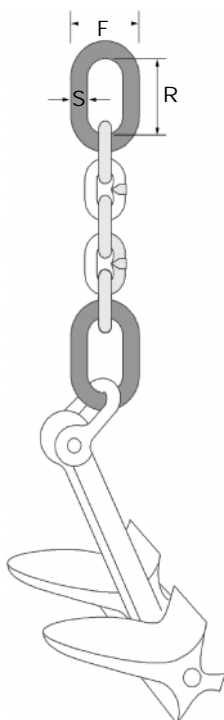

CHAIN LINK SIZE	W.L.L Tonnes	S MM	R MM	F MM
10mm	1.26	12.0	51.7	45.0
13mm	2.10	16.0	59.0	57.3
16mm	3.20	20.0	73.0	71.0
20mm	5.00	24.0	87.0	84.8
22mm	6.30	29.0	112.0	110.0

PWBAnchor Grade P Chain Grade P chain is manufactured from higher tensile steel (hardened and tempered) and provides twice the working load limit (W.L.L) Of grade L. this chain conforms to

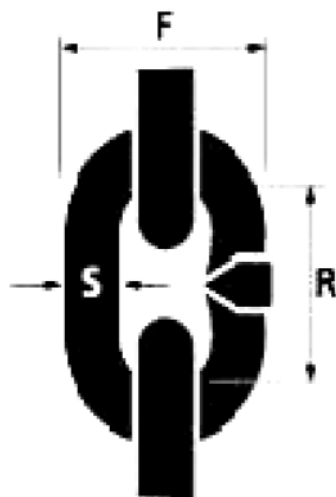

★ ★ ★
★ ★ ★
★ ★ ★
PWB ANCHOR CHAIN
PROUDLY
MADE IN AUSTRALIA

Abbreviations: S Dia F Width R Pitch MWL Max wkg load/tonne WWL Max mass which chain hanging vertical shall support in general service.

CHAIN LINK SIZE	W.L.L Tonnes	S MM	R MM	F MM	Links Per mtr	Kilos Per mtr	Link marking
6mm	0.79	6.3	18.8	21.6	53.2	1.1	PWB-P
8mm	1.28	8.0	23.8	27.0	42.0	1.44	PWB-P
10mm	2.00	10.0	29.8	34.3	33.6	2.28	PWB-P
13mm	3.38	12.5	38.0	42.5	26.3	3.46	PWB-P
16mm	5.12	16.0	47.8	54.9	20.9	5.71	PWB-P
20mm	8.00	20.0	59.2	68.5	16.9	9.00	PWB-P