


Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		120AH
Dimension	Total Height (with terminals)	218mm(8.58inches)
	Height	214mm(8.43 inches)
	Length	331mm(13.03inches)
	Width	175mm(6.89inches)
Weight		Approx.36.5kg (80.47lbs)


Discharge characteristics 77 °F (25 °C)

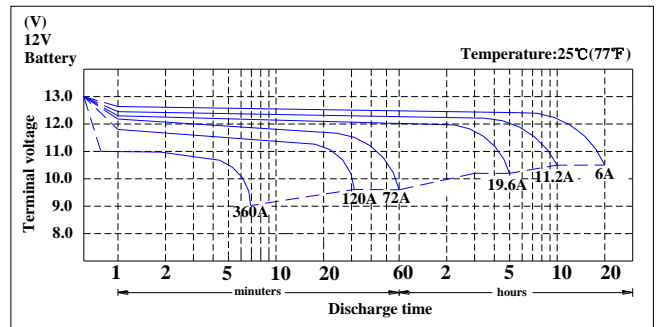

Characteristics

Capacity 77°F (25°C)	20 hour rate (6A to 10.5Volts)	120AH
	10 hour rate (11.2 to 10.5Volts)	112AH
	5 hour rate (19.6A to 10.2Volts)	98AH
Internal Resistance	Full charged 77°F (25°C)	3.8mΩ
Standard Terminal	M8	
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Max. Discharge Current 77°F (25°C)	1200A (5s)	
Cranking Performance	Cranking Amps (30-sec amps to 7.2V @ 32° F (0° C))	910A
	Cold Cranking Amps (30-sec amps to 7.2V @ 0° F (-18° C))	760A
Reserve Capacity (Minutes to 10.5V at 80°F (27°C))	@ 25Amps	230Min
	@ 75Amps	54Min
Charging (Constant Voltage)	Cycle	Initial Charging Current 24A Or Small 14.5V~14.9V/77°F (25°C)
	Float	13.6V~13.8V/77°F (25°C)

Duration of discharge vs. Discharge current

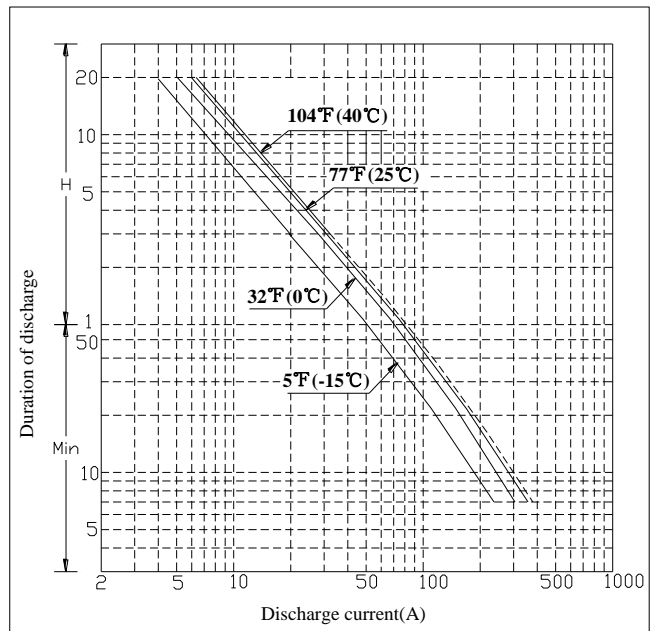

Constant Current Discharge Rating Amperes @ 77°F (25°C)

Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	182	110.3	90.3	75.5	42.2	29.2	19.1	13.65	11.16	9.6	6.0	5.03

Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.